

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H04R 17/00, 7/04, 9/06</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/13464</b> <b>(43) International Publication Date:</b> 9 March 2000 (09.03.00)
<b>(21) International Application Number:</b> PCT/GB99/02640 <b>(22) International Filing Date:</b> 24 August 1999 (24.08.99)  <b>(30) Priority Data:</b> 9818719.8                      28 August 1998 (28.08.98)                      GB  <b>(71) Applicant (for all designated States except US):</b> NEW TRANS- DUCERS LIMITED [GB/GB]; Ixworth House, 37 Ixworth Place, London SW3 3QH (GB).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> BANK, Graham [GB/GB]; 1 Boartree Way, Huntingdon, Cambridgeshire PE18 6GL (GB). HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB). MORECROFT, Denis [GB/GB]; 18 Dartmoor Drive, Huntingdon, Cambridgeshire PE18 8XT (GB).  <b>(74) Agent:</b> MAGUIRE BOSS; 5 Crown Street, St Ives, Cam- bridgeshire PE17 4EB (GB).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>
<b>(54) Title:</b> LOUDSPEAKERS COMPRISING A RESONANT PANEL-FORM MEMBER  <b>(57) Abstract</b> <p>A loudspeaker comprising a resonant panel-form member adapted to produce an acoustic output and a vibration exciting system on the panel-form member and adapted to apply bending wave energy thereto, characterised in that the vibration exciting system is adapted to apply a bending couple to the panel-form member.</p> <div data-bbox="641 1186 1307 1617"> </div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/13464

PCT/GB99/02640

1

5 LOUDSPEAKERS COMPRISING A RESONANT PANEL-FORM MEMBER

10 DESCRIPTION

15 TECHNICAL FIELD

The invention relates to loudspeakers and more particularly, but not exclusively, the invention relates to vibration exciters for exciting resonance in resonant panel-form loudspeakers e.g. of the general kind described  
20 in our International patent application WO97/09842 and which have become known as 'distributed mode' loudspeakers.

BACKGROUND ART

A known form of exciter used to drive a distributed  
25 mode loudspeaker panel is based on converting an electrical input into a force which is applied normal to the panel surface. This generates bending waves which emanate from the drive point. By suitably positioning this

WO 00/13464

PCT/GB99/02640

2

point on the loudspeaker panel, the modes in the panel can be coupled with sufficient density to make the panel act as a loudspeaker.

A disadvantage of this method of panel excitation is that it is usually preferable for the force to be applied near to the central portion of the panel, which would, for example, be impractical for a transparent panel, used in association with a visual display, where the vibration exciter should not be visible.

10        Bending waves derived from a typical force exciter also cause whole body (i.e. timpanic) mode, whose radiated sound field may interfere with a boundary placed parallel to, and in close proximity with, the rear of the panel, to form a cavity. With such a cavity behind a panel the  
15 whole body mode may appear at an undesirably high frequency. This limits the low frequency range of the loudspeaker, and may also result in an excessive resonance or peak in the frequency response at the dominating coupled system resonance.

20        It is an object of the invention to provide a method and means for exciting a resonant loudspeaker panel near to an edge of the panel.

It is another object of the invention to provide a method and means for exciting a resonant loudspeaker panel  
25 which will reduce the excitation of whole body modes.

#### DISCLOSURE OF INVENTION

According to the invention a loudspeaker comprising a resonant panel-form member adapted to produce an acoustic

WO 00/13464

PCT/GB99/02640

3

output and a vibration exciting system on the panel-form member and adapted to apply bending wave energy thereto, is characterised in that the vibration exciting system is adapted to apply a bending couple to the panel-form member.

The vibration exciting system may be adapted to apply torsion to the panel-form member. Alternatively or additionally, the vibration exciting system may be adapted to apply shear to the panel-form member.

10 The vibration exciter may be coupled to the panel-form member to span a plurality of nodal lines in the panel-form member.

The vibration exciting system may comprise a suspension on which the panel-form member is mounted, the suspension acting as a pivot about which at least a portion of an edge of the panel-form member local to the vibration exciting system can hinge. The suspension may be of a plastics foam of high shear stiffness.

The vibration exciting system may comprise a piezoelectric device attached to the panel-form member to apply a bending couple thereto by introducing alternating tension and compression to the panel-form member in the plane thereof. The piezoelectric device may be attached to a face of the panel-form member. Mirror-image piezoelectric devices may be attached to opposite faces of the panel-form member. The or each piezoelectric device may be a unimorph device. The piezoelectric device may have a portion disposed adjacent to the suspension, and a

WO 00/13464

PCT/GB99/02640

4

portion disposed remotely from the suspension. The piezoelectric device may be a thin strip-like device fixed to the panel-form member by adhesive. The piezoelectric device may be of PZT. The panel-form member may be transparent. The piezoelectric device may be transparent. The vibration exciting system may comprise an inertial device. The inertial device may comprise an inertial mass fixed to the panel-form member to prevent relative movement therebetween. The inertial device may be an inertial vibration exciter. Opposed inertial vibration exciters may be provided on opposite sides of the panel-form member. An additional inertial vibration exciter may be provided on the panel-form member and coupled to the first said inertial vibration exciter in anti-phase to damp unwanted whole body movement of the panel-form member.

The vibration exciting system may comprise an electrodynamic motor comprising a rotor having a current carrying conductor array fixed to the panel-form member and disposed with its axis parallel to the plane of the member and means generating a local magnetic field in which the rotor is positioned to apply torsion to the member.

The vibration exciting system may comprise a piezoelectric device which is generally rectangular and orientated diagonally to act as a twister.

The vibration exciting system may comprise an element rigidly coupled to and projecting away from the panel-form

WO 00/13464

PCT/GB99/02640

5

member, and means to induce bending moments in the element. The element may be generally perpendicular to the panel-form member, and bending moments may be produced by displacement in a part of the element spaced from the  
5 panel-form member, the displacement being generally perpendicular to the element. The displacement may be effected using a piezoelectric device. The displacement may be effected by an inertial device.

From another aspect the invention is a method of  
10 making a loudspeaker having a resonant panel-form member adapted to be excited to produce an acoustic output by the application of bending wave energy, comprising defining the panel-form member, mapping the panel-form member to determine the location of nodal lines, arranging a  
15 vibration exciting system on the panel-form member to apply bending wave energy thereto, with the exciting system spanning a plurality of the nodal lines and mounting the vibration system exciting to the panel-form member to apply a couple thereto.

20 The panel-form member may be defined in terms of geometry, size and/or mechanical impedance.

The panel-form member may be mapped using finite element analysis.

The method may comprise mounting the panel-form  
25 member on a suspension such that the suspension acts as a pivot about which an adjacent portion of the panel-form member can hinge, and arranging and mounting a vibration exciter on the adjacent portion of the panel-form member

WO 00/13464

PCT/GB99/02640

6

to bend the panel-form member.

From another aspect the invention is a vibration exciter for applying bending wave energy to a member and adapted to apply a bending couple to the member.

5                    BRIEF DESCRIPTION OF DRAWINGS

The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a perspective view of a first embodiment of loudspeaker according to the invention;

10        Figure 2 is a side view of a second embodiment of loudspeaker according to the invention;

Figure 2a is a nodal map of the loudspeaker of Figure 2 and for comparison Figure 2b shows a nodal map of a prior art freely-suspended loudspeaker panel;

15        Figure 3 is a plan view of the loudspeaker of Figure 2;

Figure 4 is a plan view of a variant of the loudspeaker of Figures 2 and 3;

Figure 5 is a plan view of a third embodiment of  
20 loudspeaker according to the invention;

Figure 6 is a side view of the loudspeaker of Figure 5;

Figure 6a is a plan view of a variant of the loudspeaker shown in Figures 5 and 6;

25        Figure 6b is a side view of a loudspeaker which is a variant of the loudspeaker shown in Figure 6a;

Figure 6c is a side view of a variant of the loudspeaker shown in Figure 6b;



WO 00/13464

PCT/GB99/02640

7

Figure 7 is a perspective view of a fourth embodiment according to the invention;

Figure 8 is a side view of the loudspeaker of Figure 7;

5      Figure 9 is a side view of first variant of the loudspeaker of Figures 7 and 8;

Figures 10 and 10a are respective side and plan views of a second variant of the loudspeaker of Figures 7 and 8;

Figure 11 is a perspective view of a fifth embodiment  
10 of loudspeaker according to the present invention;

Figure 12 is a perspective view of a first variant of the loudspeaker of Figure 11;

Figure 13 is a perspective view of a second variant of the loudspeaker of Figure 11;

15      Figure 14 is a side view of a sixth loudspeaker according to the present invention;

Figure 15 is a side view of the loudspeaker of Figure 14 and showing diagrammatically how the loudspeaker panel will be bent in operation;

20      Figure 16 is a side view, to an enlarged scale, of part of the loudspeaker of Figure 14 and showing details of a vibration exciter;

Figure 17 is an exploded perspective view of part of a loudspeaker and showing a seventh embodiment of the  
25 invention comprising an electrodynamic torsional vibration exciter;

Figure 18 is a perspective view of a further embodiment of electrodynamic torsional vibration exciter

WO 00/13464

PCT/GB99/02640

8

for a loudspeaker;

Figure 19 is an end view of the exciter of Figure 18 in position in a loudspeaker;

Figure 20 is a perspective view of part of a loudspeaker showing the exciter of Figure 18 in position;

Figures 21a and 21b are perspective sketches showing steps in the formation of a voice coil for the exciter of Figure 18;

Figure 22 is a perspective view of part of a further embodiment of loudspeaker;

Figure 23 is a cross-sectional view of the part of a loudspeaker shown in Figure 22;

Figure 24 is a perspective view of an embodiment of piezoelectric bimorph torsional vibration exciter fixed to a ground;

Figures 24a and 24b are respective perspective views showing the construction of the bimorph exciter of Figure 24;

Figure 25 is a view in the direction of arrow 'C' of Figure 24, and

Figure 26 is a view in the direction of arrow 'D' of Figure 24.

#### BEST MODES FOR CARRYING OUT THE INVENTION

In the drawings there are shown and described several embodiments of resonant panel-form loudspeaker of the general kind described in International patent application WO97/09842 and having novel forms of vibration exciting systems intended to prevent or reduce the exciting of

WO 00/13464

PCT/GB99/02640

9

whole body modes in the panel, and/or adapted for placement away from the central area of the panel.

In Figure 1 there is shown a loudspeaker 5 having a resonant panel-form member 1 which is excited to resonate 5 by a vibration exciting system 2 comprising a pair of inertial electrodynamic vibration exciters 4 energised via signal leads 7, the exciters being spaced apart on the panel and working in opposition to create a rocking couple to bend the panel to launch bending wave vibration 10 therein.

Figures 2 and 3 show an embodiment of loudspeaker 5 in which a vibration exciting system 2 for launching bending wave vibration into a resonant panel 1 comprises a peripheral panel suspension 3, e.g. of high shear 15 stiffness foam plastics, e.g. foamed polyvinylchloride, which is such that it resists deflection of the panel periphery but acts as a pivot to allow the panel to hinge about the suspension, and an inertial electrodynamic vibration exciter 4 mounted on the panel at a distance 20 inwards from the panel periphery and which launches bending waves into the panel using the suspension 3 as a fulcrum.

As shown in Figure 2a, the effect of mounting the panel 1 on a relatively rigid suspension which acts as a 25 pivot or hinge (in mechanical terms which may be described as "simply supported") is to move nodal lines in the panel and running generally parallel to the panel edge towards the panel edge, as compared to the position of the

WO 00/13464

PCT/GB99/02640

10

corresponding nodal lines in a generally corresponding but resiliently or freely edge-suspended panel, see Figure 2b, and the exciter 4 is positioned inboard of the panel periphery so that the vibration exciting system comprising 5 the edge suspension 3 and the exciter 4 bridges across several of these nodal lines. We have found that this is important in producing effective panel excitation, and that positioning the exciter outboard of these nodal lines does not result in such useful panel excitation.

10        Figure 2b shows the preferred exciter position taught in WO97/09842 at A while two alternative near panel edge drive positions are shown at B and C respectively. It will be seen that the B and C locations are nevertheless at a considerable distance inboard from the panel edge and do 15 not lend themselves to a loudspeaker arrangement in which the exciter must be hidden from view, e.g. one in which the loudspeaker panel is transparent and forms part of a display screen. The arrangement shown in Figures 2, 2a and 3 overcomes or mitigates this difficulty.

20        Figure 2 shows a couple of length  $y$  produced by the excitation system 2. It will be appreciated that in this embodiment where the excitation system 2 comprises the suspension 3, the suspension need act as a pivot or hinge only in the region local to the exciter 4 and that the 25 peripheral panel suspension in other locations might be of the resilient kind e.g. of soft foam rubber. Nevertheless experiments have shown that if desired the peripheral suspension may be continuous and may be wholly of the foam

WO 00/13464

PCT/GB99/02640

11

high shear stiffness plastics.

Referring to Figure 4, there is shown a loudspeaker arrangement generally similar to that of Figures 2 and 3 above and intended to avoid or reduce the occurrence of a whole body mode in the panel 1, such as might occur when the panel is in close proximity to a boundary so that a cavity is formed between the panel and boundary and modes generated in the fluid in the cavity affect the modes of the panel. This is countered in the arrangement of Figure 4 by selecting a second exciter driver position, typically on the opposite side of the panel central line from that of the primary exciter 4, and mounting a second exciter 4a at the second position so that the exciters 4 and 4a work as a pair but with the second exciter connected in reverse polarity to the primary exciter to avoid, reduce or cancel whole body mode. To prevent the second exciter 4a from affecting operation of the primary exciter 4 at frequencies other than that of the unwanted whole body modes, a band-pass or low-pass filter 6 is positioned in the signal path to the exciter 4a to limit its operation to the frequency range of interest. Instead of connecting the second exciter 4a in reverse phase electrically, it would instead be possible to mount the second exciter on the panel at such a position that it is connected in reverse phase mechanically.

Figures 5 and 6 show an embodiment of loudspeaker 5 particularly applicable to use in a visual display apparatus where the panel 1 is transparent, e.g. of clear

WO 00/13464

PCT/GB99/02640

12

polystyrene polycarbonate, acrylic, glass etc. or composites of these materials whereby a visual display panel 10, e.g. a liquid crystal display panel, is visible through the panel 1. In such an arrangement it is, of course, necessary that a vibration exciter 8 does not intrude into the display screen area, and this can be realised by mounting the exciter near to an edge of the panel 1. Also in such an arrangement, the panel 1 is of necessity in close proximity to a boundary formed by the display panel 10 so that a cavity 9 is formed therebetween.

In this embodiment, the exciter 8 is a strip of piezoelectric material, e.g. PZT, fixed to the panel 1 by an adhesive to span from the panel edge or periphery to a position inboard of the panel edge. The panel is suspended at its periphery on a high shear stiffness foam plastics so that the suspension forms a hinge or pivot as described above with reference to Figures 2 and 3. Thus the exciter 8 is arranged to span a group of nodal lines near to and generally parallel to the panel edge. The exciter 8 is a unimorph device arranged to operate by changes in length to apply shear to the panel face and thus to bend the panel about a fulcrum provided by the suspension 3 at a position local to the exciter.

Since, in this embodiment modes in the fluid in the cavity 9 may adversely affect the modes in the panel 1 so that a whole body mode appears at an undesirably high frequency, a second antiphase exciter 8a, generally

WO 00/13464

PCT/GB99/02640

13

similar to exciter 8, may be positioned on the panel as described with reference to Figure 4 above. Alternatively the second exciter 8a may be positioned on the panel to act to double the power input to the panel to increase 5 loudness.

If desired, the panel 10 might be transparent, e.g. of glass, so that the loudspeaker 5 may be positioned in front of an object, e.g. a visual display unit, to be viewed through the loudspeaker whereby sound and vision 10 can be correlated. Also the exciters 8,8a may be of transparent piezoelectric material.

It will be appreciated that, if desired, the exciter system comprising the suspension 3 and the piezo unimorph exciter 8 could be used in a loudspeaker not having a back 15 panel 10.

In the loudspeaker embodiments of Figures 2 to 6, the high shear stiffness suspension 3 could be replaced by a panel-edge stiffening (not shown) either fixed to the panel edge or integral therewith, with the stiffened edge 20 forming part of the exciter system. The panel edge may thus be freely suspended if desired. Also as shown in Figure 6a, the high shear peripheral suspension 3 can be replaced by an inertial mass 34 suitably positioned at a nodally dense or low bending amplitude region of the panel 25 to form a reference point with the exciter 8 positioned to extend from the reference point to a suitably vibrationally active adjacent area so that the couple applied by the exciter system comprising the inertial mass

WO 00/13464

PCT/GB99/02640

14

34 and the exciter 8 straddles a number or group of nodal lines in similar manner to that explained with reference to Figure 2a above, thus providing good coupling to the region and thence to the panel. In this embodiment, the high shear stiffness suspension 3 is replaced by a resilient edge suspension 39.

Figure 6b shows an embodiment of loudspeaker 5 generally similar to that of Figure 6a and in which there is no back panel, such as that shown at 10 in Figure 6a.

10 Figure 6c is an embodiment of loudspeaker 5 very similar to that of Figure 6b and comprising an exciter system having an opposed pair of inertial masses 24 and exciters 8 on opposite sides of the panel to reinforce and thus increase the drive and thus the loudness.

15 The reference point formed by the inertial mass 34 could, if desired, be replaced by a pin or point clamp (not shown) on the panel in the embodiments of Figure 6a to 6c.

Figures 7 and 8 of the drawings show a resonant panel 20 loudspeaker 5 in which bending wave energy is introduced into a panel 1 via an excitation system 2 comprising a plate-like lever element 11 rigidly mounted on the panel 1 at a suitable nodal position and extending generally at right angles to the plane of the panel 1. An electrodynamic inertial vibration exciter 4 is mounted on the lever element 11 to apply force at right angles to the plane of the element 11 to apply a rotational or bending couple to the panel.



WO 00/13464

PCT/GB99/02640

15

Figure 9 shows a first variant of the loudspeaker embodiment of Figure 8 in which the lever element 11 is extended through the panel 1 whereby opposed exciters 4 can be mounted on opposite ends of the lever element to increase the drive force.

Figures 10 and 10a show a second variant of the loudspeaker of Figure 8 in which the panel 1 is mounted on a suspension 3 of the kind described with reference to Figures 2 and 3, and the panel is extended on one side beyond this suspension so that an exciting system comprising a lever element 11 and an inertial exciter 4 is mounted outboard of the suspension 3 and operates by bending the panel about the fulcrum provided by the suspension 3.

Figure 11 shows a loudspeaker 5 in which bending waves are launched into a panel 1 via a rotary or torsional electrodynamic vibration exciter 12 mounted in a slot in the panel. This class of exciter is described more fully with reference to Figures 17 to 21 below.

Figure 12 shows a variant of the loudspeaker of Figure 11 in which the rotational or torsional exciter 12 is coupled to an edge of the panel 1 so that the exciter is disposed outboard of the panel.

Figure 13 shows a variant of the loudspeaker of Figure 12, in which a torsional piezoelectric vibration exciter 13 is coupled to an edge of a panel 1 and has at its distal end an inertial mass 14 or instead is grounded e.g. to a loudspeaker frame (not shown). Such an

WO 00/13464

PCT/GB99/02640

16

arrangement is shown in more detail in Figures 24 to 26 below.

Figures 14 to 16 of the drawings show a loudspeaker 5 in which a panel 1 is excited with bending wave energy by means of a pair of piezoelectric differential exciters 15 disposed in opposed positions on opposite faces of the panel 1. Each of the exciters 15 comprises an opposed unimorph pair of opposing orientation, indicated by the positive and minus signs in the drawings, joined end to end to form a strip. The exciters work by changes in length and thus while one half of each exciter is contracting in length, the other is extending. The exciter on one side of the panel is arranged to oppose the exciter on the other side. The exciters thus apply shear forces 15 to the panel to cause it to bend with a double curvature as shown in Figure 15. The rotational couples and their axes 16 are illustrated in Figure 16. The exciters may be of PZT material.

Figure 17 shows an embodiment of loudspeaker having 20 an electrodynamic torsional vibration exciter 12 of the inertial kind and comprising a voice coil 17 and a magnet system 18 forming a motor in which the voice coil is the rotor. The voice coil 17 comprises a coil 20 wound onto a former 19 which is flattened and elongated to form two 25 parallel sets of windings. The magnetic system 18 comprises a permanent bar magnet 21 on which a pole 22 is centrally mounted, supported on a non-magnetic spacer 23. The pole 22 and magnet 21 are sandwiched between side

WO 00/13464

PCT/GB99/02640

17

plates 24 having castellations 25 defining notches 26.

Since the exciter 12 is a torsional device, the axis of rotation of the rotor formed by the voice coil is in the plane of the panel 1 to ensure that no unwanted moments are applied. A sufficient clearance between coil and magnet assembly must be provided to allow sufficient angular rotation between the two to occur.

As shown the coil 17 is fixed by its opposite sides in a slot or aperture 27 in the panel, and since the flux needs to pass through the coil, sections of the side plates 24 are removed to form the notches 26 to accommodate coil/panel fixing tabs 28. These fixing tabs 28 extend inwards from the slot 27 to contact and mount the voice coil on the panel 1. The tabs 28 can be fixed to the voice coil 17 by adhesive means. The magnet system 18 can be attached to the panel with a simple suspension means, e.g. resilient means (not shown).

The magnet system 18 could, if desired, also be fixed to a reference ground.

20 An alternative embodiment of inertial torsional electrodynamic motor vibration exciter 12 which reduces shear in the coil former is shown in Figures 18 to 21 in which a coil 20 is mounted on a cylindrical former tube 19 to form a rotor. By winding the coil along a tubular 25 former 10, the effects of shear are reduced. A flexible printed circuit 29 could also form the windings, and which is subsequently wrapped around the coil as shown in Figures 21a and 21b. PADDICK, U.S. Patent 5,446,979 shows

WO 00/13464

PCT/GB99/02640

18

such a method for conventional circular voice coils, but in the present application we propose to wind the conductor along the length of the tubular former. The magnetic system 18 is formed by a permanent magnet 21, 5 connected to outer pole pieces 24, forming a North Pole and South Pole whilst a central cylindrical pole 22 is held in place on the magnet 21 by a non-magnetic spacer 23.

As shown in Figures 19 and 20, the exciter 12 is 10 mounted in a slot 27 in a panel 1 with its axis in the plane of the panel and with opposite sides of the coil former 19 fixed to the panel 1 to apply an alternating couple thereto when a signal is applied to the coil. The magnet system 18 may be mounted on a resilient suspension 15 (not shown) such that the device operates as an inertial exciter due to the mass of the magnet system.

As shown in Figures 22 and 23, it is also possible to introduce torsion into the panel by using an exciter 30 comprising a pair of unimorph piezoelectric elements, 20 31,32 mounted in a slot 27 in the panel 1 and attached to opposite ends of a lever 11 extending through the panel and rigidly attached at one end of the slot. The elements 31,32 are set at an angle, connected to the opposite ends of a lever 11, and at their opposite ends are connected 25 together.

The first piezoelectric element 31, which will increase in length when a voltage is applied to its electrodes is attached to upper end of lever 11, with its

WO 00/13464

PCT/GB99/02640

19

opposite end connected to an inertial mass 34 embedded or suspended on the panel 1. The second piezoelectric element 32 is located on the opposite side of the panel, and is electrically connected in opposition to the first, 5 such that a voltage applied to its electrodes causes it to shorten. One end of element 32 is connected to the lower end of the lever and the other end to the inertial mass 34. The actions of the two piezoelectric devices together produce a moment on the lever which introduces bending 10 waves into the panel. A reference point is provided either by the inertial mass 34, or a connection is made to a ground to provide a reference point.

The lever exciter 30 is located with respect to the panel to introduce the maximum rotation, as well as the 15 optimal modal density. This could be completely let into the panel, as shown, or attached at or near to the edge of the panel. A number of such exciters could be arranged to introduce bending waves in concert to improve modal density.

20 Figures 24 to 26 show an embodiment of torsional vibration exciter 13 for a loudspeaker 5 of the kind shown in Figure 13, comprising a generally rectangular bimorph piezoelectric twister 35 having a top element 36 orientated diagonally and a bottom element 37 orientated 25 diagonally such that an applied voltage causes the top element to contract diagonally while the bottom element is caused to expand diagonally as indicated by arrows in Figure 24a, the top and bottom elements being cemented

WO 00/13464

PCT/GB99/02640

20

together to form a bimorph bender with a resulting twisting action. This exciter might be used directly on a panel 1 to excite the panel to resonate, but a further refinement could be to ground one end of the bimorph as 5 shown at 38 where the twisting now occurs at the ungrounded end, but the magnitude is doubled. This ground could take the form of a substantial frame, or may be an inertial mass.

#### INDUSTRIAL APPLICABILITY

10       The invention describes a new class of loudspeaker and vibration exciters for loudspeakers and which work in torsion and which exhibit possible advantages over force exciters in their ability to operate at different locations on a panel member to be vibrated as compared to 15 force exciters and in their ability to prevent or reduce whole body moments in the panel member to be vibrated.

WO 00/13464

PCT/GB99/02640

21

CLAIMS

1. A loudspeaker comprising a resonant panel-form member adapted to produce an acoustic output and a vibration exciting system on the panel-form member and adapted to  
5 apply bending wave energy thereto, characterised in that the vibration exciting system is adapted to apply a bending couple to the panel-form member.
2. A loudspeaker according to claim 1, wherein the vibration exciting system is adapted to apply torsion to  
10 the panel-form member.
3. A loudspeaker according to claim 1 or claim 2, wherein the vibration exciting system is adapted to apply shear to the panel-form member.
4. A loudspeaker according to any one of claims 1 to 3,  
15 characterised in that the vibration exciter is coupled to the panel-form member to span a plurality of nodal lines in the panel-form member.
5. A loudspeaker according to any preceding claim, wherein the vibration exciting system comprises a  
20 suspension on which the panel-form member is mounted, the suspension acting as a pivot about which at least a portion of an edge of the panel-form member local to the vibration exciting system can hinge.
6. A loudspeaker according to claim 5, wherein the  
25 suspension is of a plastics foam of high shear stiffness.
7. A loudspeaker according to any preceding claim, wherein the vibration exciting system comprises a piezoelectric device attached to the panel-form member to

WO 00/13464

PCT/GB99/02640

22

apply a bending couple thereto by introducing alternating tension and compression to the panel-form member in the plane thereof.

8. A loudspeaker according to claim 7, wherein the  
5 piezoelectric device is attached to a face of the panel-form member.

9. A loudspeaker according to claim 7 or claim 8, comprising mirror-image piezoelectric devices attached to opposite faces of the panel-form member.

10 10. A loudspeaker according to any one of claims 7 to 9, when dependent on claim 5 or claim 6, wherein the piezoelectric device has a portion disposed adjacent to the suspension, and a portion disposed remotely from the suspension.

15 11. A loudspeaker according to any one of claims 7 to 11, wherein the piezoelectric device is a thin strip-like device fixed to the panel-form member by adhesive.

12. A loudspeaker according to any one of claims 7 to 11, wherein the piezoelectric device is a unimorph device.

20 13. A loudspeaker according to claim 12, wherein the unimorph device comprises opposed parts arranged such that one part increases in length while the other part contracts.

14. A loudspeaker according to any preceding claim,  
25 wherein the panel-form member is transparent.

15. A loudspeaker according to any one or claims 7 to 14, wherein the piezoelectric device is transparent.

16.. A loudspeaker according to any one of claims 7 to 15,



WO 00/13464

PCT/GB99/02640

23

wherein the piezoelectric device is of PZT.

17. A loudspeaker according to any one of claims 1 to 6 or 14, wherein the vibration exciting system comprises an inertial device.

5 18. A loudspeaker according to claim 17, wherein the inertial device comprises an inertial mass rigidly fixed to the panel-form member to form a suspension pivot.

19. A loudspeaker according to claim 17, wherein the inertial device is an inertial vibration exciter.

10 20. A loudspeaker according to claim 19, comprising opposed inertial vibration exciters on opposite sides of the panel-form member.

21. A loudspeaker according to claim 19 or claim 20, comprising an additional inertial vibration exciter on the  
15 panel-form member and coupled to the first said inertial vibration exciter in anti-phase to damp unwanted whole body movement of the panel-form member.

22. A loudspeaker according to any one of claims 1 to 6 or 14, wherein the vibration exciting system comprises an  
20 electrodynamic motor having a rotor with a current-carrying conductor array fixed to the panel-form member with its axis parallel to the plane of the member to apply torsion thereto, and a magnet forming a magnetic field in which the rotor is positioned.

25 23. A loudspeaker according to any one of claims 1 to 6, 14, 17 or 19, wherein the vibration exciting system comprises a bimorph piezoelectric device which is generally rectangular and orientated diagonally to act as

WO 00/13464

PCT/GB99/02640

24

a twister.

24. A loudspeaker according to any one of claims 1 to 6, 14, 22 or 23, wherein the vibration exciting system comprises an element rigidly coupled to and projecting 5 away from the panel-form member, and means to induce bending moments in the element.

25. A loudspeaker according to claim 24, wherein the element is generally perpendicular to the panel-form member, bending moments are produced by displacement in a 10 part of the element spaced from the panel-form member, and the displacement is generally perpendicular to the element.

26. A loudspeaker according to claim 25, wherein the displacement is effected using a piezoelectric device.

15 27. A loudspeaker according to claim 24 or claim 25, wherein the displacement is effected by an inertial device.

28. A method of making a loudspeaker having a resonant panel-form member adapted to be excited to produce an 20 acoustic output by the application of bending wave energy, comprising defining the panel-form member, mapping the panel-form member to determine the location of nodal lines, arranging a vibration exciting system on the panel-form member to apply bending wave energy thereto, with the 25 exciting system spanning a plurality of the nodal lines and mounting the vibration system exciting to the panel-form member to apply a couple thereto.

29. A method according to claim 28, wherein the panel-

WO 00/13464

PCT/GB99/02640

25

form member is defined in terms of geometry, size and/or mechanical impedance.

30. A method according to claim 28 or claim 29, wherein the panel-form member is mapped using finite element  
5 analysis.

31. A method according to any one of claims 28 to 30, comprising mounting the panel-form member on a suspension such that the suspension acts as a pivot about which an adjacent portion of the panel-form member can hinge, and  
10 arranging and mounting a vibration exciter on the adjacent portion of the panel-form member to bend the panel-form member.

32. A vibration exciter for applying bending wave energy to a stiff resonant loudspeaker panel-form member and  
15 adapted to apply a bending couple to the member.

WO 00/13464

PCT/GB99/02640

1/14

Fig. 1.


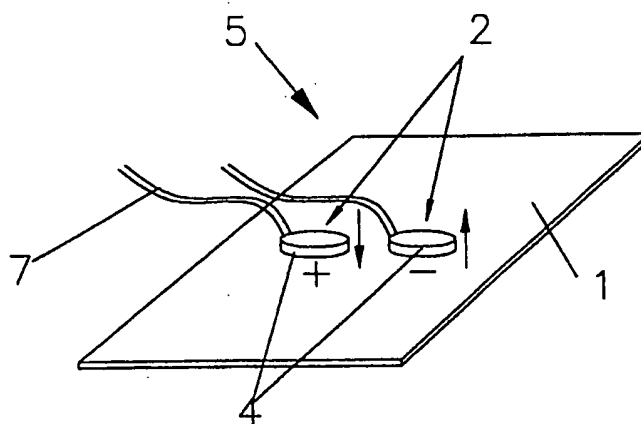


Fig. 2.

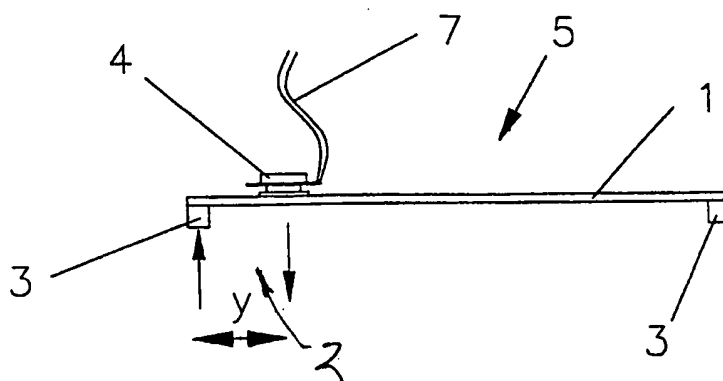


WO 00/13464

PCT/GB99/02640

2/14

Fig. 2a.

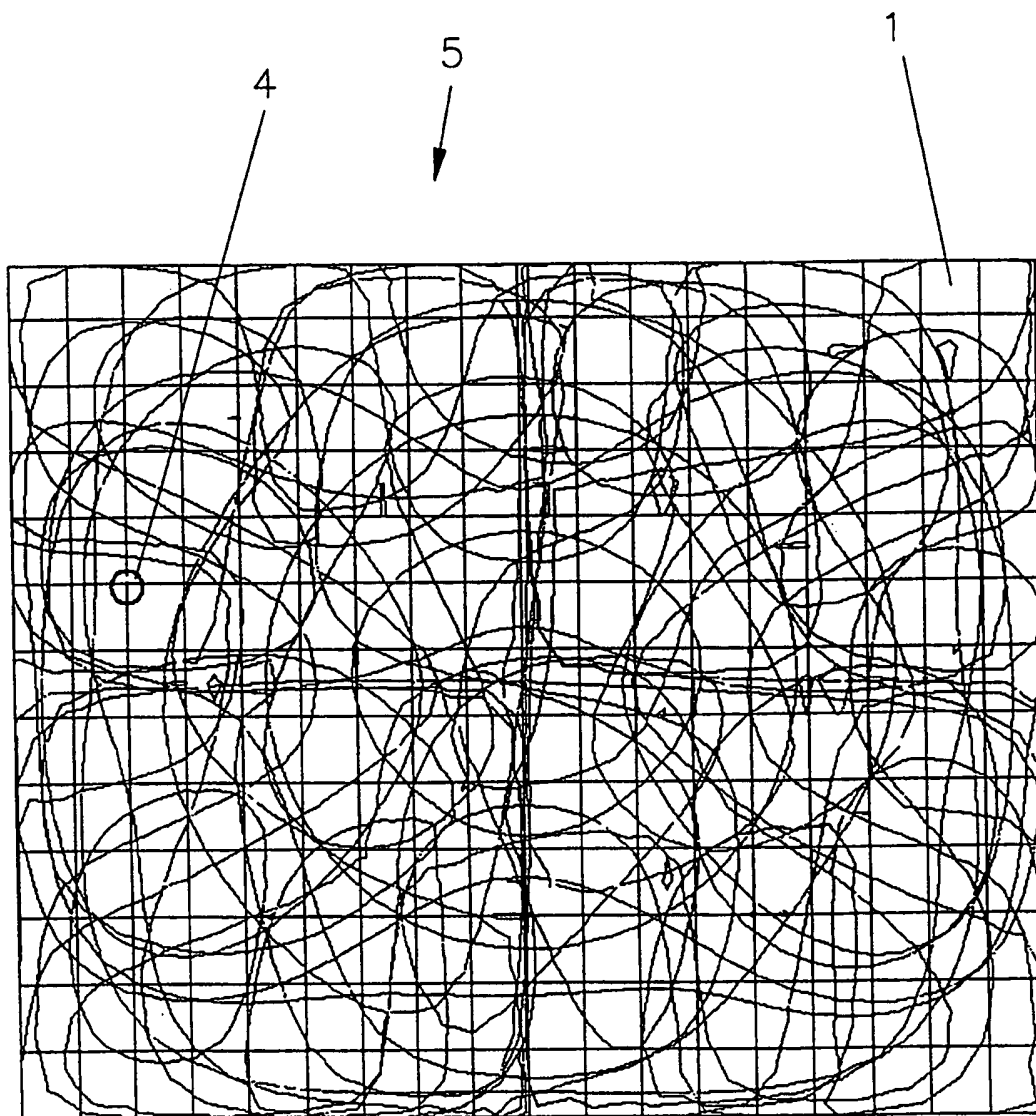


WO 00/13464

PCT/GB99/02640

3/14

Fig. 2b.

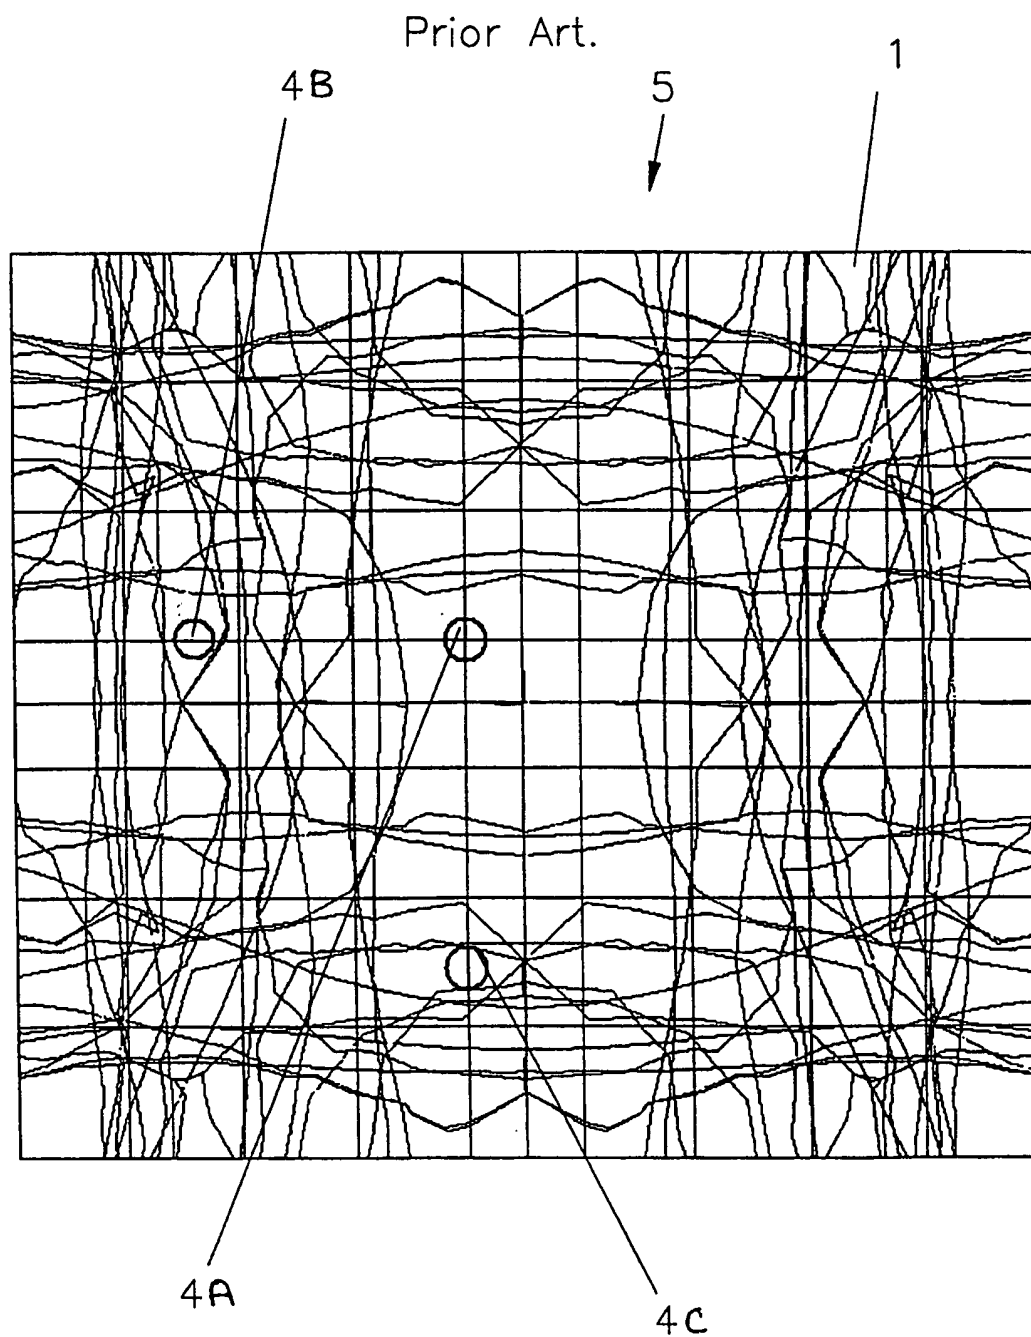

**WO 00/13464**

**PCT/GB99/02640**

4/14

Fig. 3.


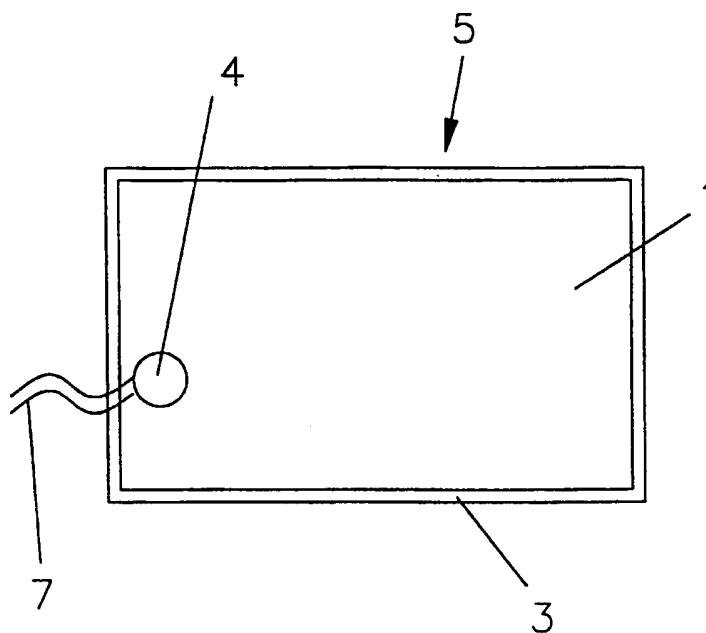


Fig. 4.

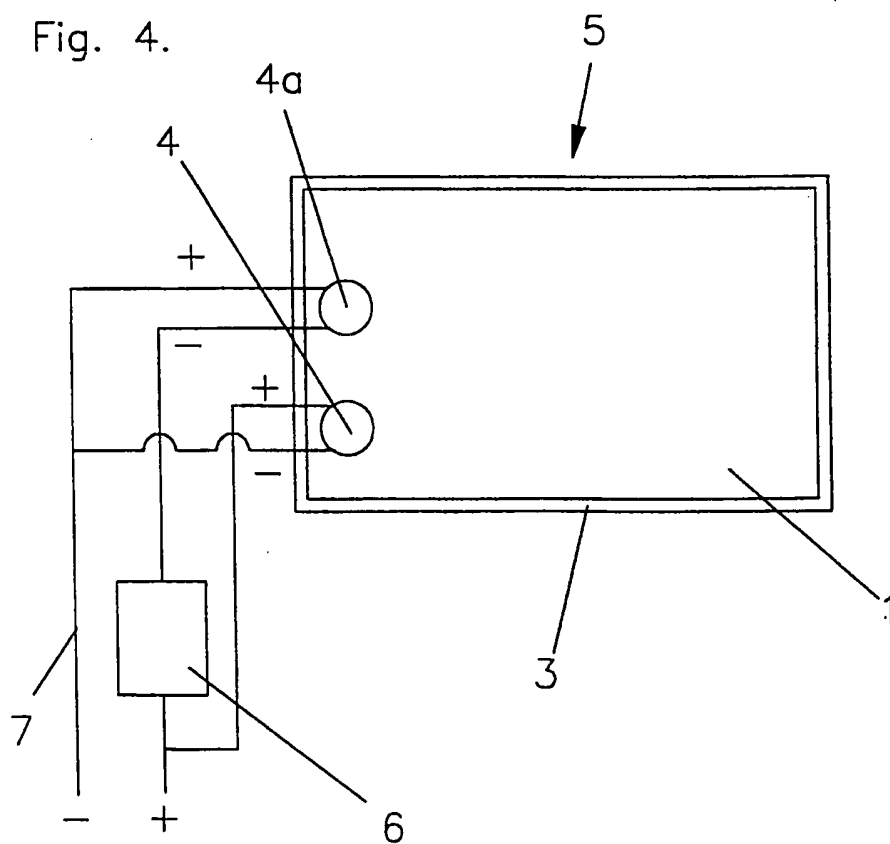

WO 00/13464

PCT/GB99/02640

5/14

Fig. 5.


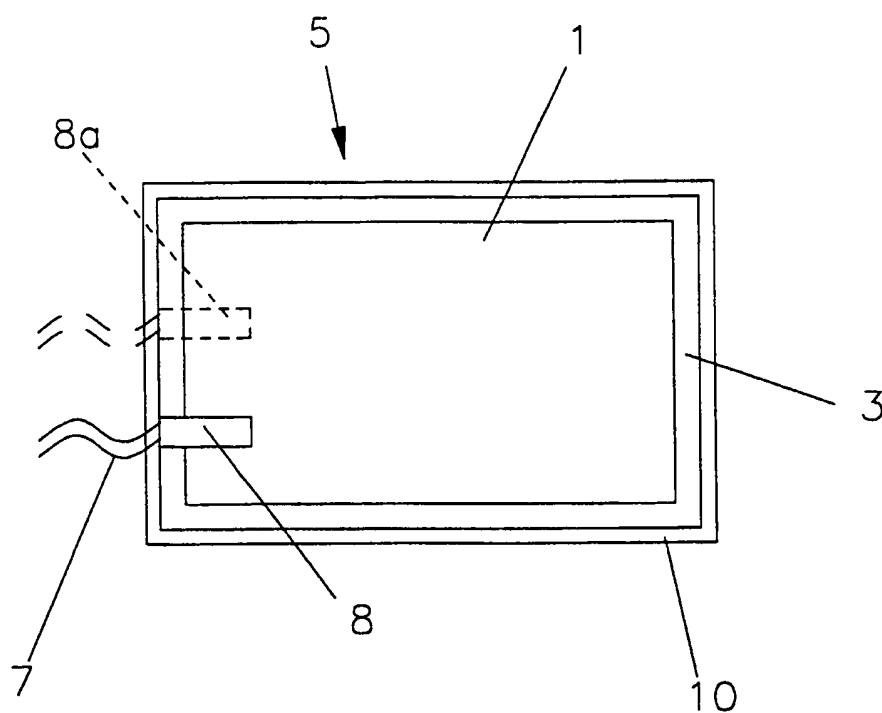


Fig. 6.



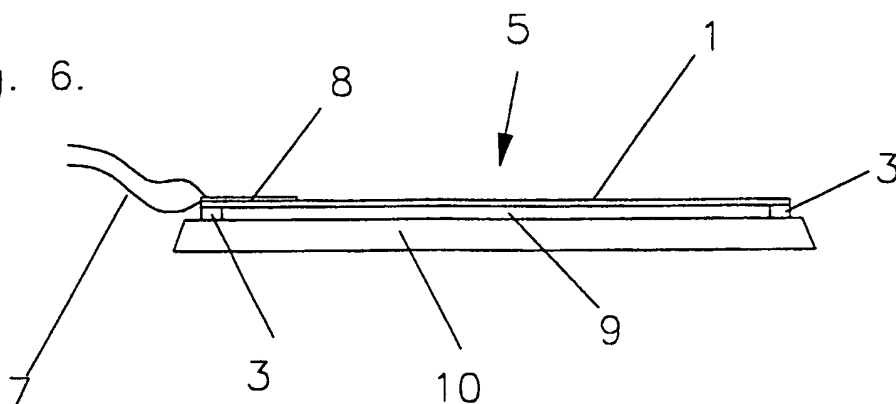

WO 00/13464

PCT/GB99/02640

6/14

Fig. 6a.

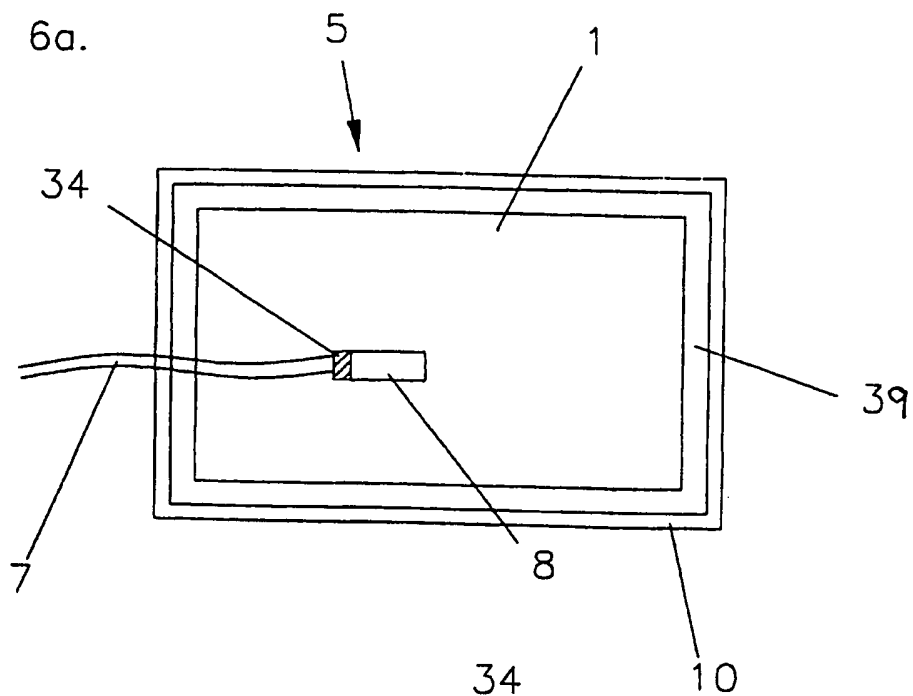


Fig. 6b.


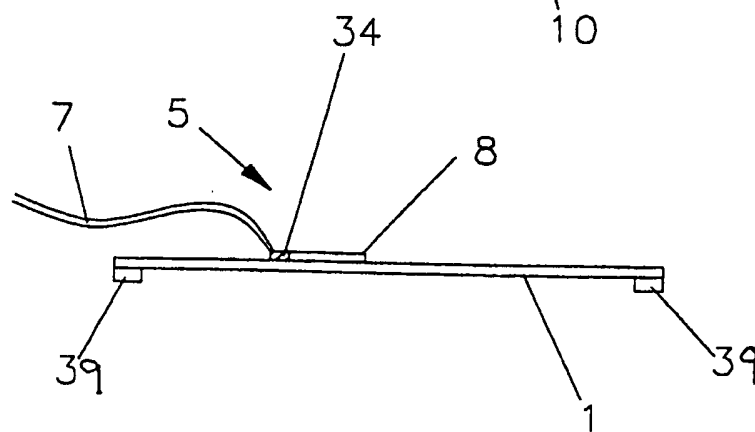


Fig. 6c.

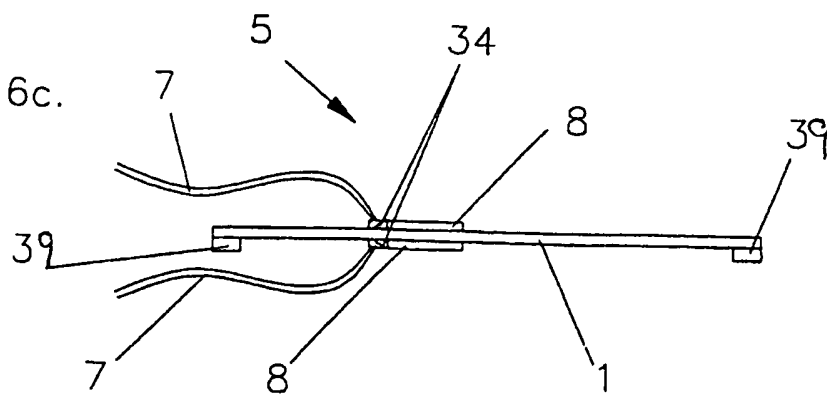

WO 00/13464

PCT/GB99/02640

7/14

Fig. 7.

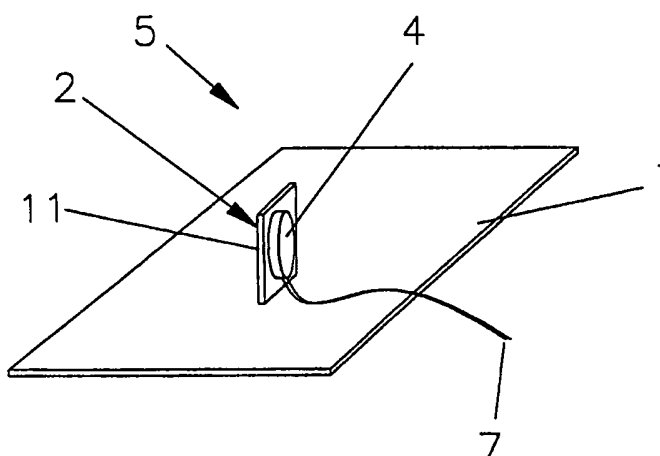


Fig. 8.


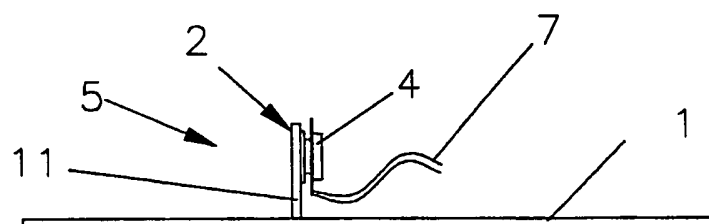


Fig. 9.

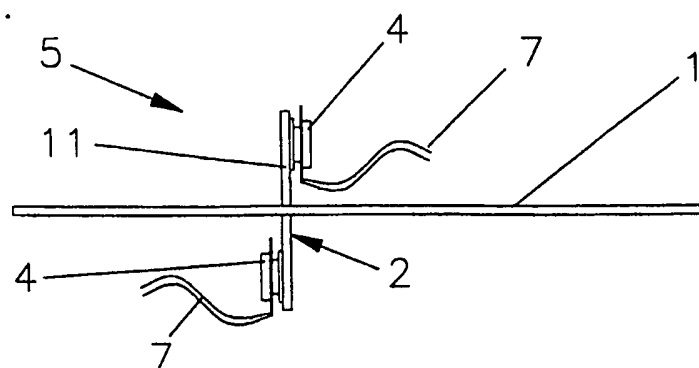

WO 00/13464

PCT/GB99/02640

8/14

Fig. 10.


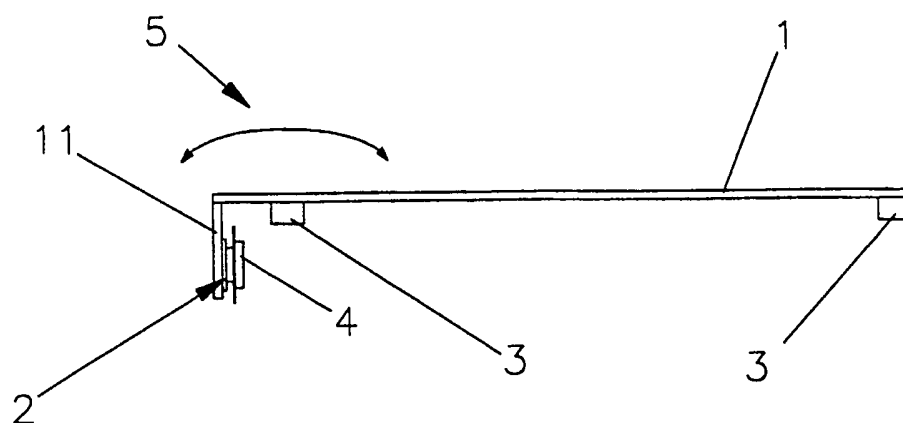


Fig. 10a.

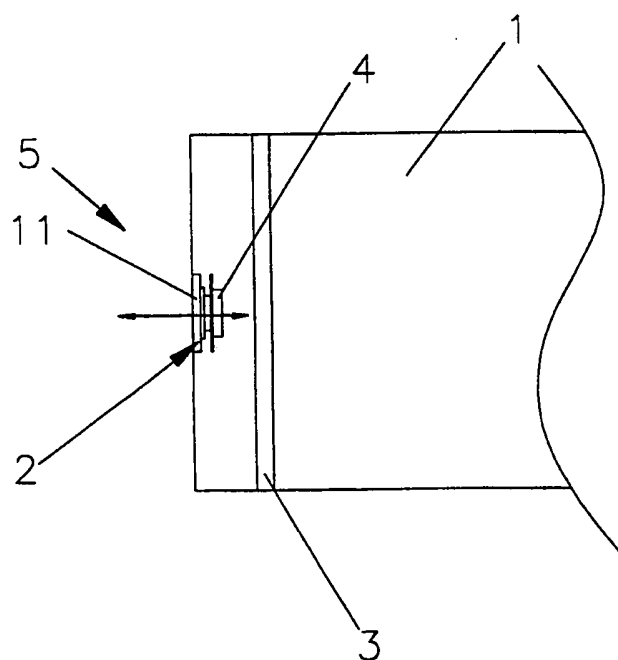

WO 00/13464

PCT/GB99/02640

9/14

Fig. 11.

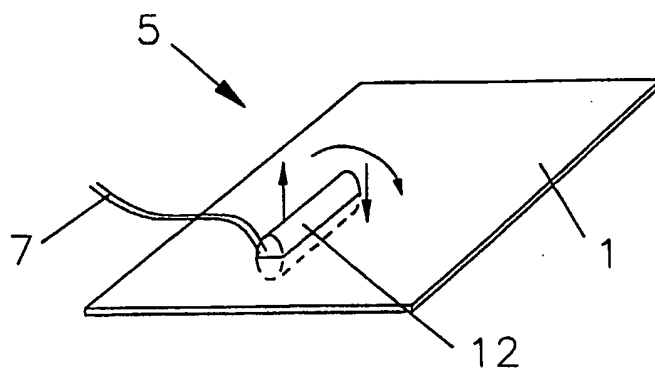


Fig. 12.


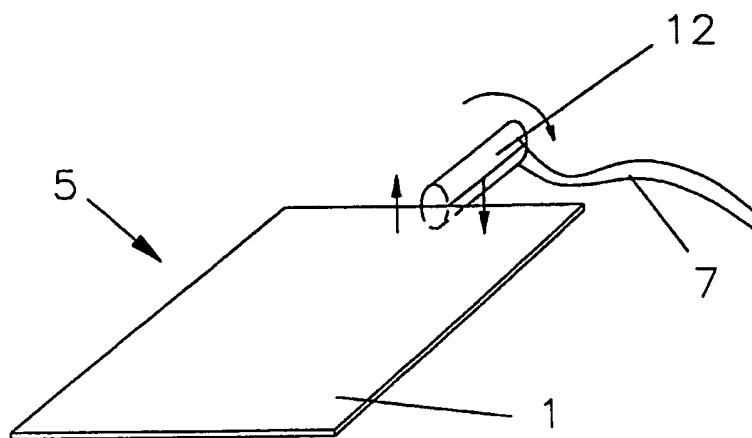


Fig. 13.

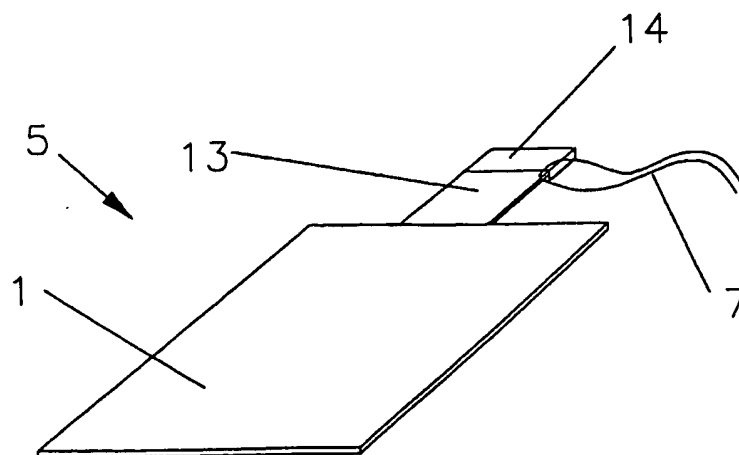

WO 00/13464

PCT/GB99/02640

10/14

Fig. 14.

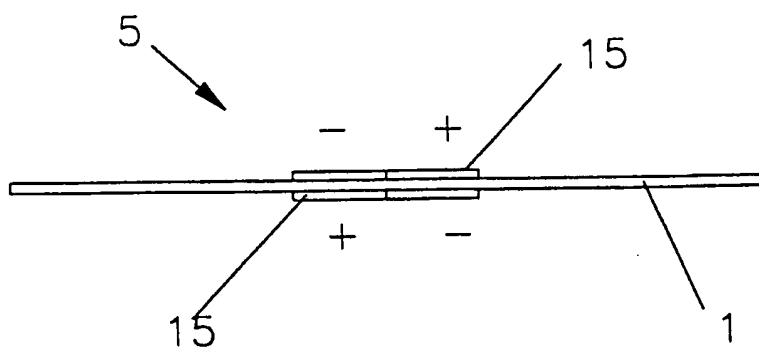


Fig. 15.


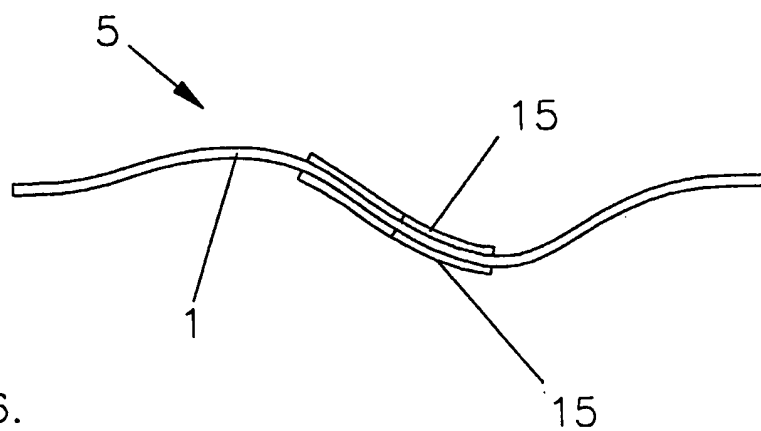


Fig. 16.

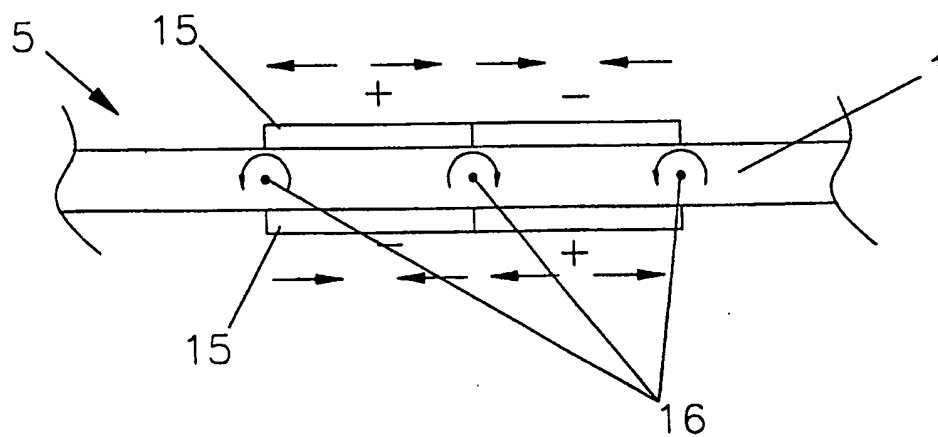

WO 00/13464

PCT/GB99/02640

11/14

Fig. 17.

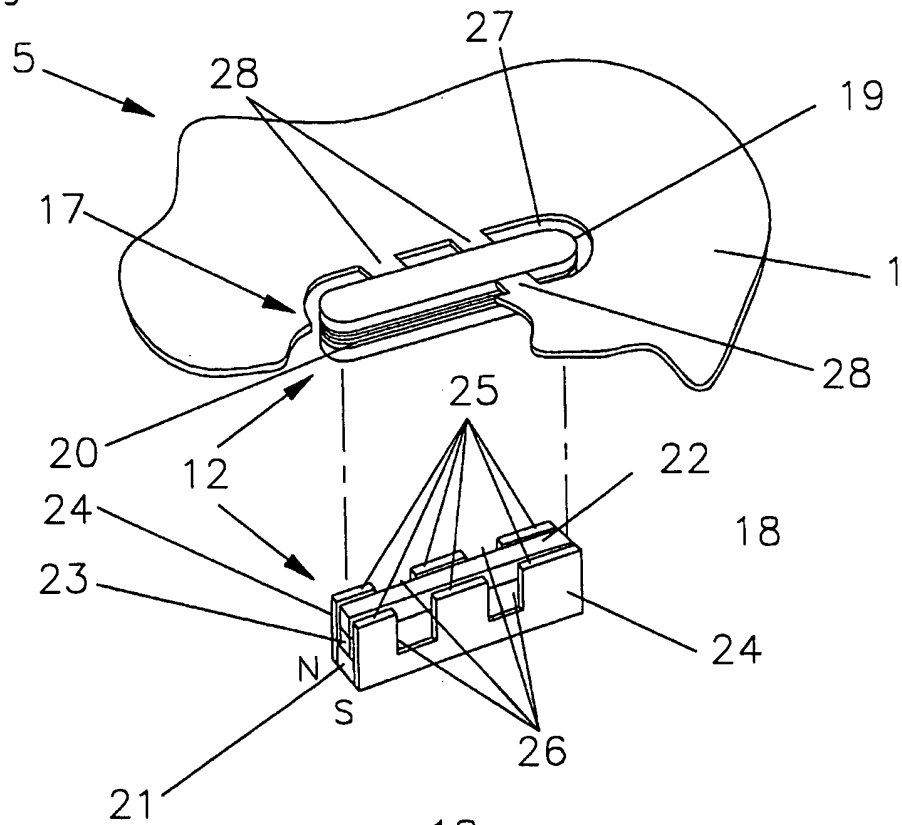


Fig. 18.


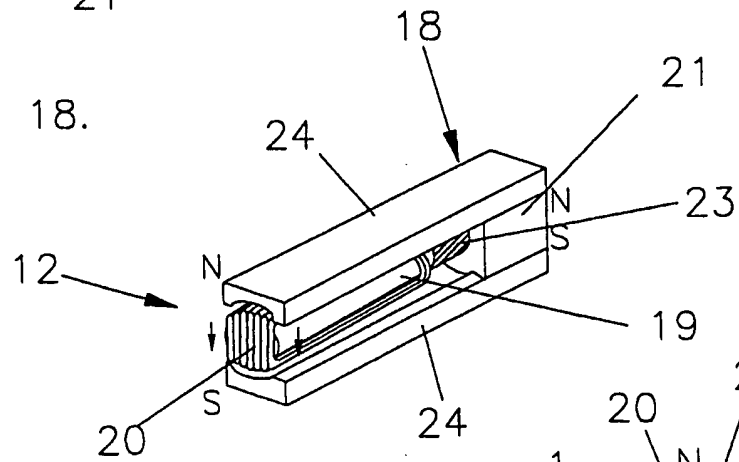


Fig. 19.

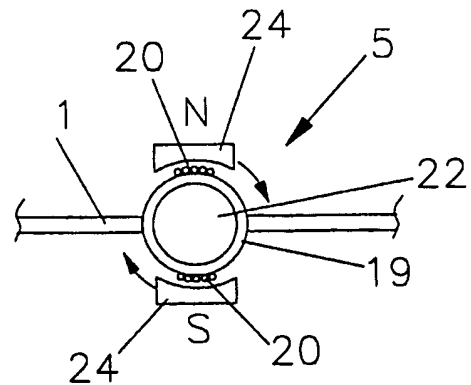

WO 00/13464

PCT/GB99/02640

12/14

Fig. 20.

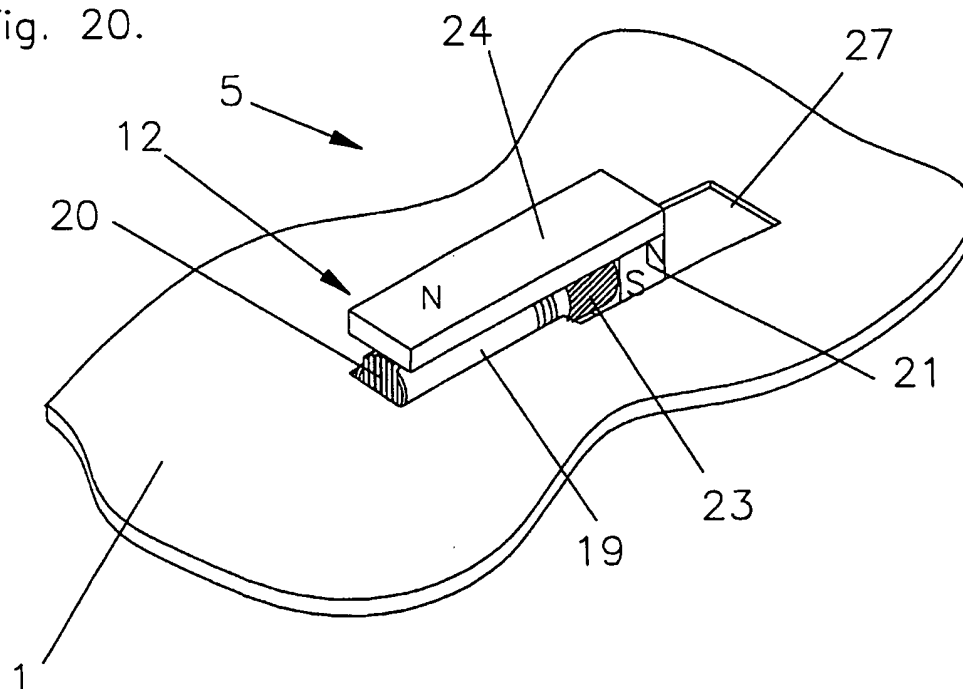


Fig. 21a

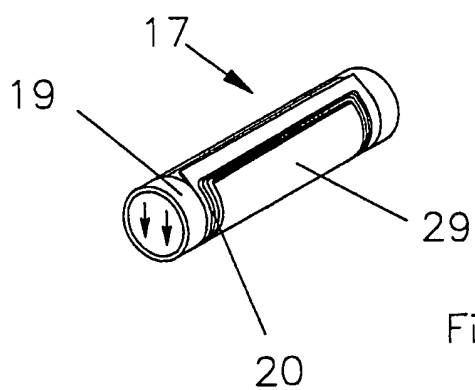
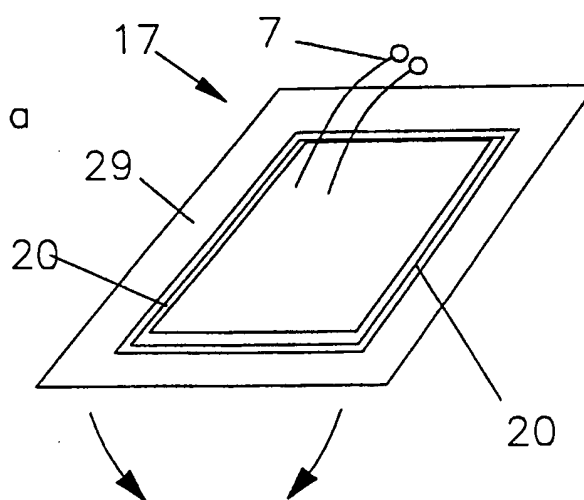


Fig. 21b

WO 00/13464

PCT/GB99/02640

13/14

Fig. 22.


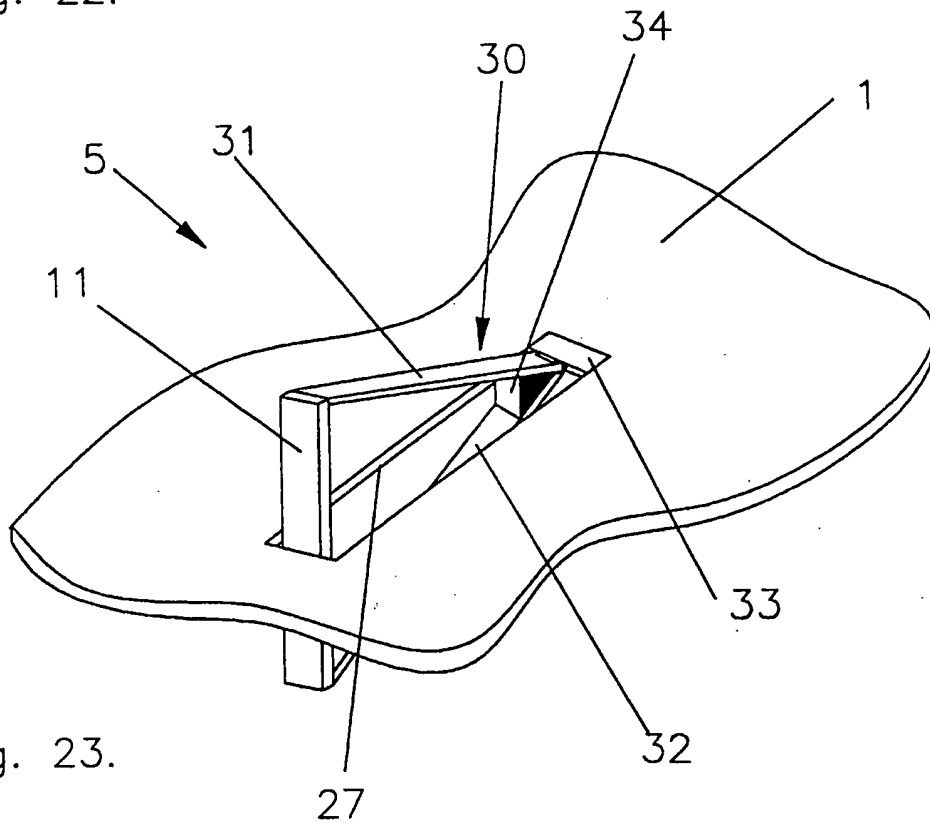


Fig. 23.



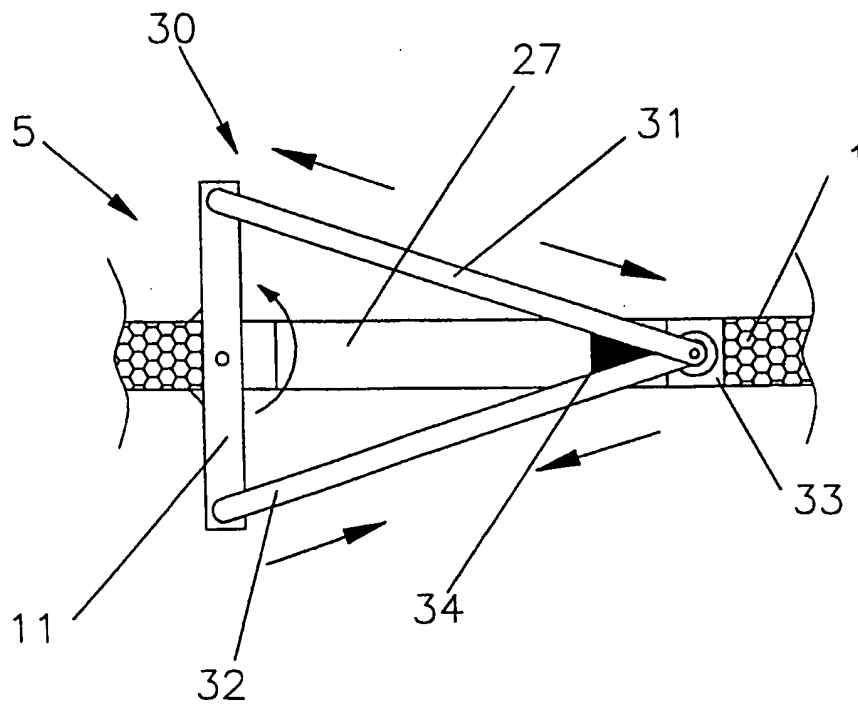

WO 00/13464

PCT/GB99/02640

14/14

Fig. 24.

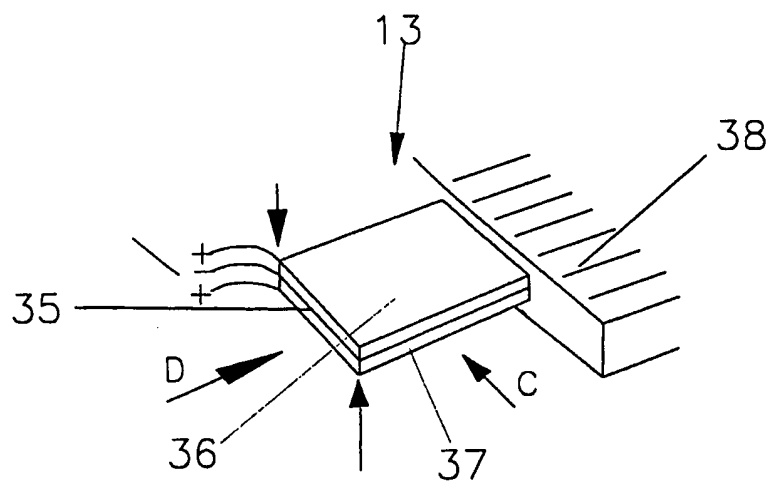


Fig. 24a.

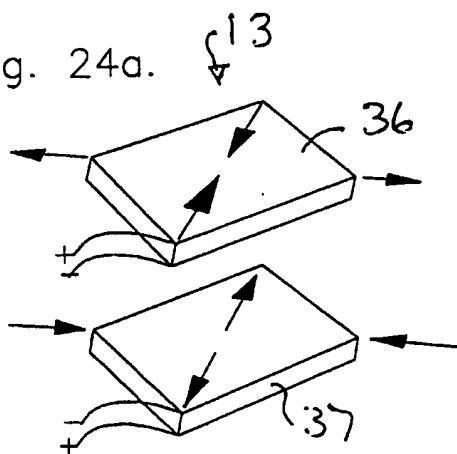


Fig. 24b.



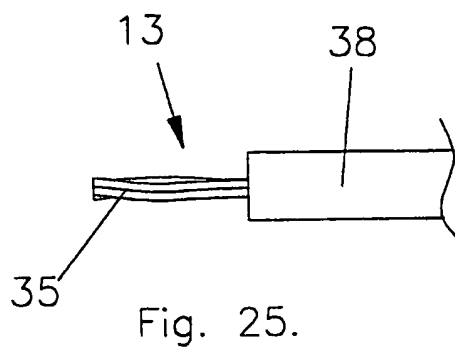


Fig. 25.

Fig. 26.

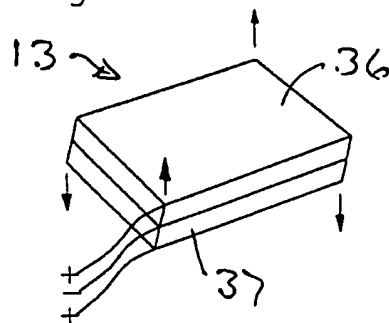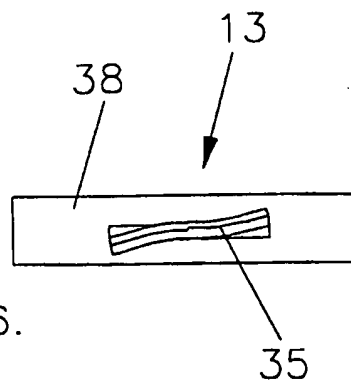

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/02640

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04R17/00 H04R7/04 H04R9/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 09842 A (AZIMA HENRY ;HARRIS NEIL (GB); COLLOMS MARTIN (GB); VERITY GROUP P) 13 March 1997 (1997-03-13) cited in the application page 50, line 35 -page 52, line 11; figure 7 ---	1-32
A	US 5 317 642 A (DANLEY THOMAS J ET AL) 31 May 1994 (1994-05-31) column 1, line 43 -column 2, line 63; figures ---	1,22,28, 32
A	WO 98 31188 A (DJAHANSOUZI BIJAN ;NEW TRANSDUCERS LTD (GB); AZIMA HENRY (GB); BAN) 16 July 1998 (1998-07-16) page 11, line 27 -page 13, line 6; figure 7 ---	1,22,28, 32
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

25 January 2000

Date of mailing of the international search report

02/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gastaldi, G

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/02640

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 010, no. 228 (E-426), 8 August 1986 (1986-08-08) & JP 61 061598 A (MATSUSHITA ELECTRIC IND CO LTD), 29 March 1986 (1986-03-29) abstract ---	1, 14, 15
A	US 4 654 554 A (KISHI KANESUKE) 31 March 1987 (1987-03-31) column 2, line 32 -column 3, line 15 -----	1

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/02640

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9709842 A	13-03-1997	AT 177579 T	15-03-1999
		AT 177574 T	15-03-1999
		AT 177580 T	15-03-1999
		AT 177575 T	15-03-1999
		AT 186617 T	15-11-1999
		AT 177581 T	15-03-1999
		AT 177582 T	15-03-1999
		AT 177583 T	15-03-1999
		AT 177578 T	15-03-1999
		AT 177576 T	15-03-1999
		AT 179297 T	15-05-1999
		AT 177577 T	15-03-1999
		AT 179563 T	15-05-1999
		AT 176826 T	15-03-1999
		AT 179045 T	15-04-1999
		AT 179296 T	15-05-1999
		AT 177281 T	15-03-1999
		AT 179564 T	15-05-1999
		AT 177282 T	15-03-1999
		AT 179043 T	15-04-1999
		AT 179044 T	15-04-1999
		AU 702865 B	11-03-1999
		AU 6880196 A	27-03-1997
		AU 702920 B	11-03-1999
		AU 6880296 A	27-03-1997
		AU 702867 B	11-03-1999
		AU 6880396 A	27-03-1997
		AU 703015 B	11-03-1999
		AU 6880496 A	27-03-1997
		AU 702863 B	11-03-1999
		AU 6880596 A	27-03-1997
		AU 702873 B	11-03-1999
		AU 6880696 A	27-03-1997
		AU 702999 B	11-03-1999
		AU 6880796 A	27-03-1997
		AU 703061 B	11-03-1999
		AU 6880896 A	27-03-1997
		AU 703000 B	11-03-1999
		AU 6880996 A	27-03-1997
		AU 703071 B	11-03-1999
		AU 6881096 A	27-03-1997
		AU 703058 B	11-03-1999
		AU 6881296 A	27-03-1997
		AU 705592 B	27-05-1999
		AU 6881396 A	27-03-1997
		AU 703296 B	25-03-1999
		AU 6881496 A	27-03-1997
		AU 699890 B	17-12-1998
		AU 6881596 A	27-03-1997
		AU 703198 B	18-03-1999
US 5317642 A	31-05-1994	NONE	
WO 9831188 A	16-07-1998	AU 5334998 A	03-08-1998
		CZ 9902412 A	13-10-1999
		EP 0951801 A	27-10-1999
		ZA 9800064 A	07-07-1998
		AU 8870298 A	22-03-1999

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/02640

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9831188 A		WO 9912387 A	11-03-1999
JP 61061598 A	29-03-1986	NONE	
US 4654554 A	31-03-1987	JP 61192199 A	26-08-1986
		JP 1668181 C	29-05-1992
		JP 3032959 B	15-05-1991
		JP 62014599 A	23-01-1987
		JP 1668182 C	29-05-1992
		JP 3032960 B	15-05-1991
		JP 62014600 A	23-01-1987
		JP 1668175 C	29-05-1992
		JP 3032958 B	15-05-1991
		JP 61065600 A	04-04-1986
		JP 1732663 C	17-02-1993
		JP 4022400 B	16-04-1992
		JP 61150500 A	09-07-1986
		DE 3531325 A	07-05-1986
		FR 2569931 A	07-03-1986
		FR 2574609 A	13-06-1986
		FR 2574610 A	13-06-1986
		GB 2166022 A	23-04-1986